
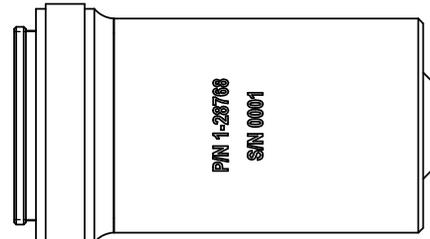
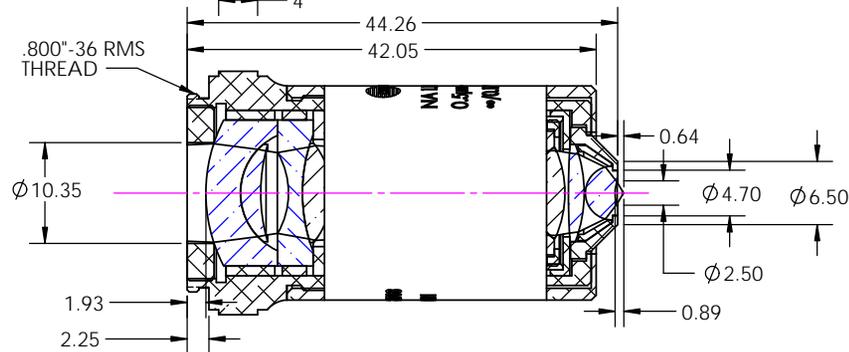


STRAIGHT KNURL 35 TPI
 Ø25mm AFTER KNURLING

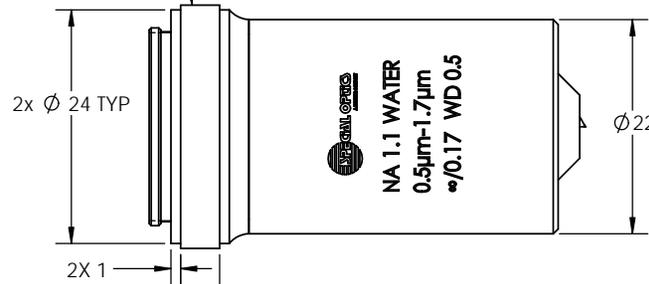

OUTLINE

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	0	PROTOTYPE	09/11/2018	
	A	REVISED PER NEW PRESCRIPTION	9/25/2018	

ALL SPACERS MECHANICALS PARTS: ALUMINUM 6061-T6
 FINISH: ANODIZE, MIL-A8625, TYPE II, CLASS II, BLACK FLAT
 ROHS COMPLIANT

HOUSING, COVER, AND FRONT SPACER: ALUMINUM 6061-T6
 FINISH: ELECTROLESS NICKEL PLATE.
 PER MIL-C-26074(0.0003"-0.0005" NOMINAL BUILD UP).
 GRADE A, CLASS 4, TYPE IV, 5%-9% PHOSPHORUS CONTENT

INTERPRET GEOMETRIC TOLERANCING PER LATEST ANSI Y14.5 SPEC.		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 Special Optics Inc. 3 Stewart Court Denville, NJ 07834
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SPECIAL OPTICS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SPECIAL OPTICS IS PROHIBITED.		DIMENSIONS ARE IN mm TOLERANCES: LINEAR: $\pm .25$ XX $\pm .13$ ANGULAR: $\pm .25$ X $\pm .05$ XX $\pm .005$		DRAWN	AFP	
1-28768		MATERIAL		CHECKED	JO	XXX
NEXT ASSY		FINISH		ENG APPR.		
APPLICATION		DO NOT SCALE DRAWING		MFG APPR.		
				Q.A.		
				 THIRD ANGLE PROJECTION		TITLE: ASSEMBLY 54-10-4.5 @ 500-1700nm
				SCALE: 2:1	WEIGHT: 40.50	SHEET 1 OF 2
				SIZE	DWG. NO.	REV
				B	1-28768	A